



Charlevoix Cobra



Manufactured in U.S.A.
Per Buy American Act 41U.S.C.

Description


- Series: EHCUS-ED
- Lamp Life Rating: 100,000 Hours
- Lumen Maintenance: 70% over 100,000 Hours
- Light Output: 5000K, 85 CRI
- IP Rating: IP65
- Applications: Freeway, secondary roads, parking lots
- EPA: 1.9ft²
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Bi-Level Ballast option dims to 40% power for additional energy savings
- Specular reflector optimized for induction lamp geometry
- Acrylic lens with Type II full cut off, or Type III
- Die cast aluminum housing with weatherproof powder coated finish
- Individual, isolated compartments protect ballast, lamp and slip-fit mounting hardware
- Tool-less entry for easy access, with gasket seal for IP65 ingress protection rating

*Patent Pending

Ordering Information

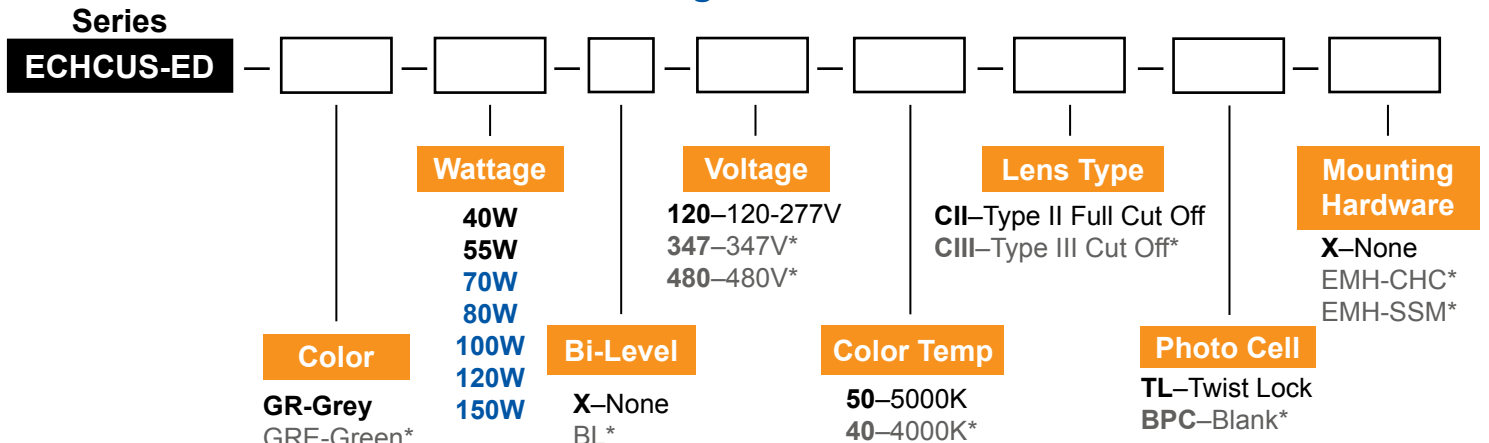

Bold = Standard

Grey * = Upgrade options available upon request


Blue = Bi-Level Wattage Options

Example: **EHCUS-ED-GR-100-BL-120-50-CII-TL-X**

Recommended Roadway Lighting

IES Recommended Spacing	100W
Local	365'
Collector	230'
Major	150'
Expressway/Freeway A	110'
Freeway B	160'

Grid Statistics	100W
Average	0.7fc
Max	1.2fc
Min	0.4fc
Max/Min	3.0
Avg/Min	1.80




Call Toll Free: 888-383-7578


www.everlastlight.com



Dimensions

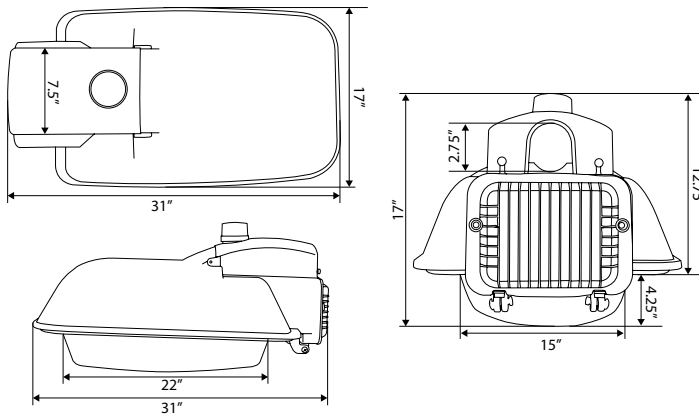

Photometric Data

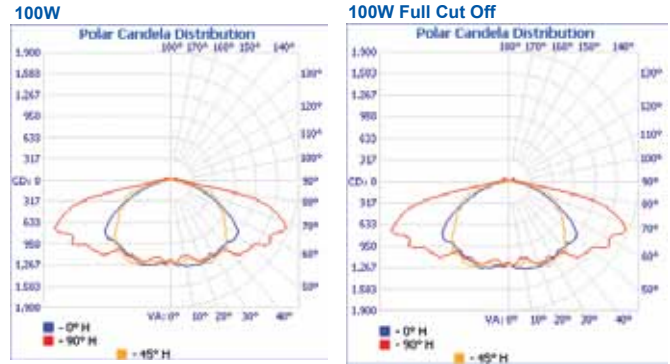



Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
40W	3,350	84	82-85	5000	100,000 hours
55W	4,650	84	82-85	5000	100,000 hours
70W / 28W	5,900/2,400	84	82-85	5000	100,000 hours
80W / 32W	7,150/2,900	84	82-85	5000	100,000 hours
100W / 40W	8,400/3,400	84	82-85	5000	100,000 hours
120W / 48W	10,100/4,100	84	82-85	5000	100,000 hours
150W / 60W	12,600/5,100	84	82-85	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
44W	120-277V/480V*	0.38-0.17A / 0.10A	50/60Hz	>0.95	-40 to 130 F°	<10%
61W	120-277V/480V*	0.50-0.21A / 0.13A	50/60Hz	>0.95	-40 to 130 F°	<10%
78W / 82.6 / 36.9 dimmed	120-277V/480V*	0.63-0.29A / 0.16A	50/60Hz	>0.95	-40 to 130 F°	<10%
90W / 94.4 / 46.9 dimmed	120-277V/480V*	0.70-0.32A / 0.19A	50/60Hz	>0.95	-40 to 130 F°	<10%
111W / 118.0 / 58.5 dimmed	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-40 to 130 F°	<10%
134W / 141.6 / 70.1 dimmed	120-277V/480V*	1.05-0.46A / 0.28A	50/60Hz	>0.95	-40 to 130 F°	<10%
165W / 166.0 / 85.0 dimmed	120-277V/480V*	1.35-0.61A / 0.35A	50/60Hz	>0.95	-40 to 130 F°	<10%

BUG Rating

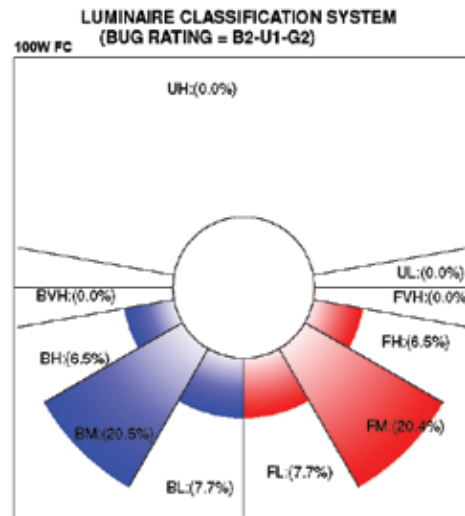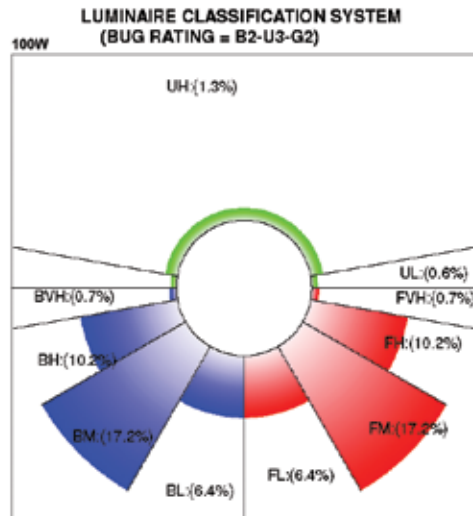

*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of pending patent applications in the US and PCT applications for International protection.

Call Toll Free: 888-383-7578

www.everlastlight.com

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203. Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.