



Wellworth Cobra



Description

- Series: ECHUS-EC
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP65
- Applications: Freeway, highway, secondary roads
- EPA: 1.6ft²
- Warranty: 10 Year Limited

Specifications and Patent Pending Features


- Bi-Level Ballast option dims to 40% power for additional energy savings
- Specular reflector optimized for induction lamp geometry
- Integrated heat sink system for extended life
- Acrylic lens with Type III, medium throw prescription
- Full cutoff heavy duty aluminum/hybrid interior design with increased durability for harsh environments
- Excellent vibration & shock resistance
- Fixture body 80% recycled polycarbonate resin



Manufactured in U.S.A.
Per Buy American Act 41U.S.C.

*Protected by U.S. Patents No. D636,526; D636,518; D638,162. Additional Patents Pending

Ordering Information

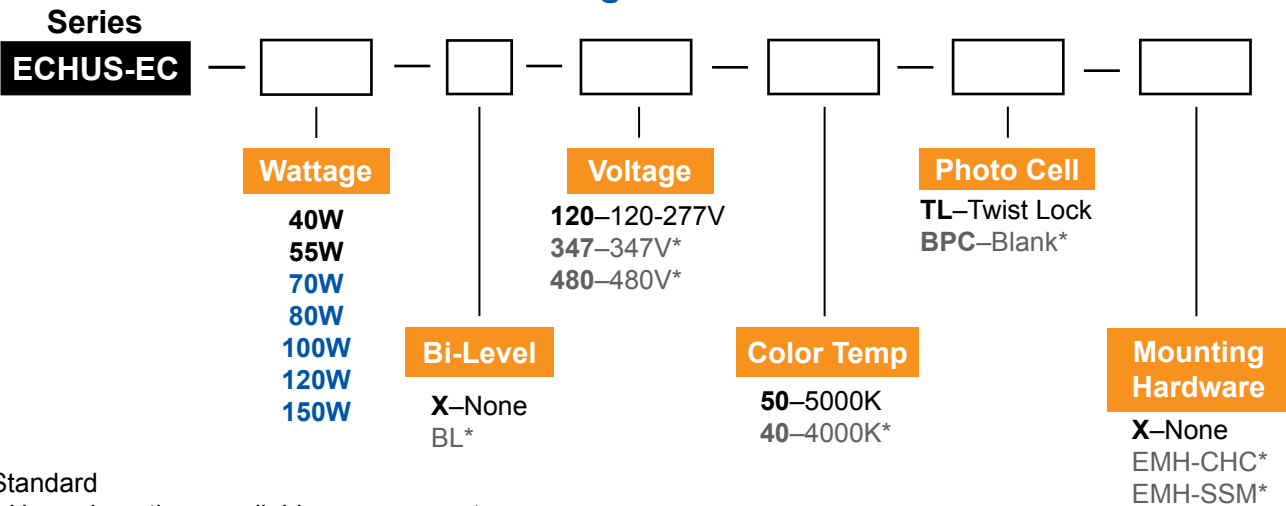

Bold = Standard

Grey * = Upgrade options available upon request

Blue = Bi-Level Wattage Options

Example: **ECHUS-EC-70-BL-120-50-TL-X**

Application Image




MDOT I-94 Installation, Detroit, MI

Call Toll Free: 888-383-7578

www.everlastlight.com




Dimensions

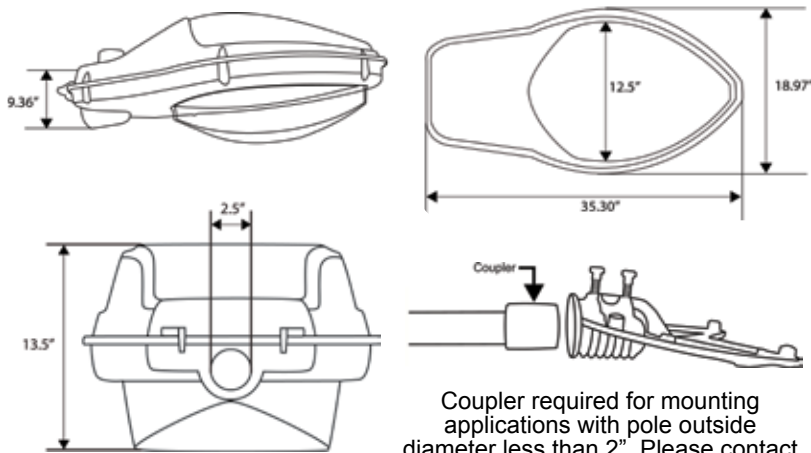

Coupler required for mounting applications with pole outside diameter less than 2". Please contact EverLast® for more information.


Photometric Data

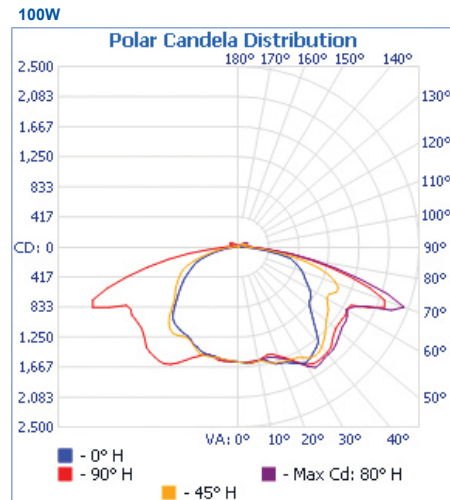

Recommended Roadway Lighting

| IES Recommended Spacing | 100W |
|-------------------------|------|
| Local | 350' |
| Collector | 220' |
| Major | 140' |
| Expressway/Freeway A | 100' |
| Freeway B | 150' |

| Grid Statistics | 100W |
|-----------------|-------|
| Average | 0.4fc |
| Max | 1.2fc |
| Min | 0.1fc |
| Max/Min | 12.0 |
| Avg/Min | 4.0 |



Lamp Specifications

| Wattage | Lumens | L/W Ratio | CRI | CCT (KELVIN) | Rated Life |
|----------|--------------|-----------|-------|--------------|---------------|
| 40W | 3,350 | 84 | 82-85 | 5000 | 100,000 hours |
| 55W | 4,650 | 84 | 82-85 | 5000 | 100,000 hours |
| 70W/28W | 5,900/2,400 | 84 | 82-85 | 5000 | 100,000 hours |
| 80W/32W | 7,150/2,900 | 84 | 82-85 | 5000 | 100,000 hours |
| 100W/40W | 8,400/3,400 | 84 | 82-85 | 5000 | 100,000 hours |
| 120W/48W | 10,100/4,100 | 84 | 82-85 | 5000 | 100,000 hours |
| 150W/60W | 12,600/5,100 | 84 | 82-85 | 5000 | 100,000 hours |

Ballast Specifications

| System Wattage | Input Voltage | Input Current | Input Freq. | Power Factor | Ambient Temp | THD |
|---------------------------|----------------|--------------------|-------------|--------------|---------------|------|
| 44W | 120-277V/480V* | 0.38-0.17A / 0.10A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |
| 61W | 120-277V/480V* | 0.50-0.21A / 0.13A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |
| 78W/ 82.6 / 36.9 dimmed | 120-277V/480V* | 0.63-0.29A / 0.16A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |
| 90W/ 94.4 / 46.9 dimmed | 120-277V/480V* | 0.70-0.32A / 0.19A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |
| 111W/ 118.0 / 58.5 dimmed | 120-277V/480V* | 0.93-0.42A / 0.22A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |
| 134W 141.6 / 70.1 dimmed | 120-277V/480V* | 1.05-0.46A / 0.28A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |
| 165W/ 166.0 / 85.0 dimmed | 120-277V/480V* | 1.35-0.61A / 0.35A | 50/60Hz | >0.95 | -40 to 130 F° | <10% |

*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of U.S. Patents No. D636,526; D636,518; D638,162 Additional Patents Pending.

Call Toll Free: 888-383-7578

www.everlastlight.com

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203. Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.