



Davenport Garage



Description


- Series: EGFUS-EC
- Lamp Life Rating: 100,000 hours
- Light Output: 5000K, 85 CRI
- IP Rating: IP65
- Applications: Parking garages, gas stations, canopies
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Bi-Level Ballast option dims to 40% power for additional energy savings
- Engineered optics provide uniform distribution and decreased levels of driver / pedestrian glare
- Heat sink technology and isolated ballast compartment
- Modular construction for easy installation and maintenance
- Die cast aluminum housing with powder coat finish for corrosion resistance

*Patent Pending

Ordering Information

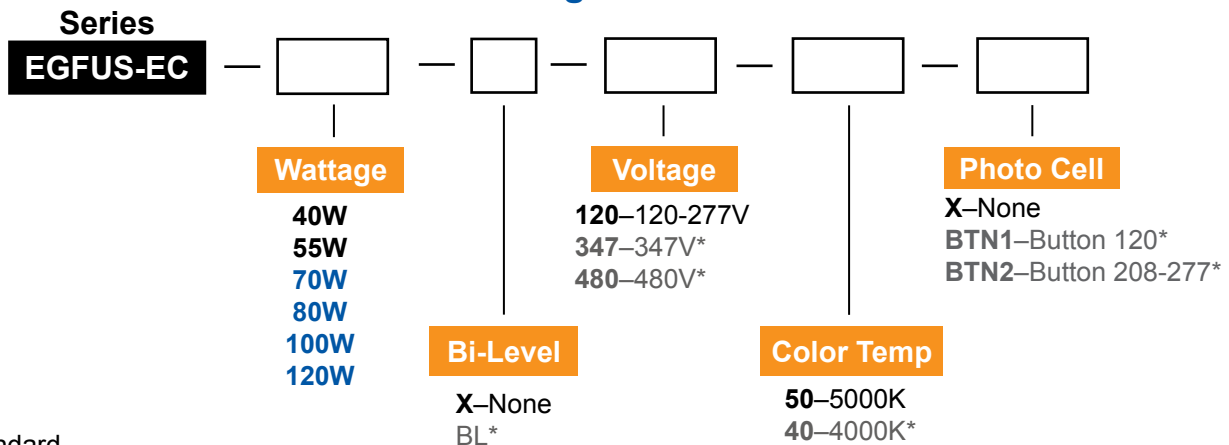

Bold = Standard

Grey * = Upgrade options available upon request

Blue = Bi-Level Wattage Options

Example: **EGFUS-EC-70-BL-120-50-X**

Application Image



Capitol Park Plaza, Washington DC


Call Toll Free: 888-383-7578

www.everlastlight.com


© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203.
Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.



Dimensions

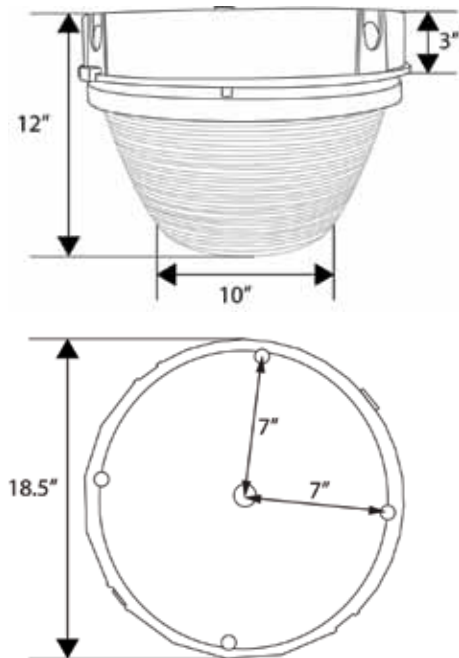

Photometric Data

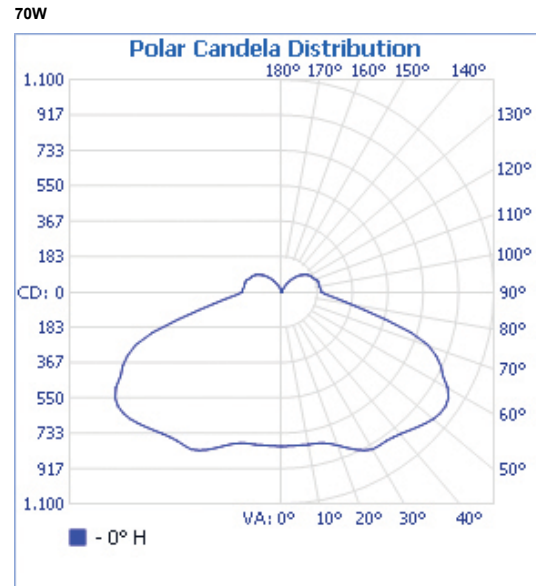

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
40W	3,350	84	82-85	5000	100,000 hours
55W	4,650	84	82-85	5000	100,000 hours
70W / 28W	5,900/2,400	84	82-85	5000	100,000 hours
80W / 32W	7,150/2,900	84	82-85	5000	100,000 hours
100W / 40W	8,400/3,400	84	82-85	5000	100,000 hours
120W / 48W	10,100/4,100	84	82-85	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
44W	120-277V/480V*	0.38-0.17 / 0.10	50/60Hz	>0.95	-40 to 130 F°	<10%
61W	120-277V/480V*	0.50-0.21 / 0.13	50/60Hz	>0.95	-40 to 130 F°	<10%
78W/ 82.6 / 36.6 dimmed	120-277V/480V*	0.69-0.30A / 0.17A	50/60Hz	>0.95	-40 to 130 F°	<10%
90W/ 94.4 / 46.9 dimmed	120-277V/480V*	0.79-0.34A / 0.20A	50/60Hz	>0.95	-40 to 130 F°	<10%
111W/ 118.0 / 58.5 dimmed	120-277V/480V*	0.98-0.43A / 0.25A	50/60Hz	>0.95	-40 to 130 F°	<10%
134W/ 141.6 / 70.1 dimmed	120-277V/480V*	1.18-0.51A / 0.30A	50/60Hz	>0.95	-40 to 130 F°	<10%

*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of pending patent applications in the US and PCT applications for International protection.

Call Toll Free: 888-383-7578

www.everlastlight.com

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203.
Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.