



Full Cutoff Wall Pack




Description

- Series: EOFC-ED
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP54
- Applications: Security lighting, buildings, parking lots, schools, and shopping centers
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Bi-Level Ballast option dims to 40% power for additional energy savings
- Die cast aluminum housing with bronze, white or black powder coat finish for corrosion-resistance
- Tempered flat clear glass lens for increased strength
- Lightweight and compact structure for easy maintenance
- Electronic ballast with high power factor
- Excellent vibration & shock resistance

Ordering Information

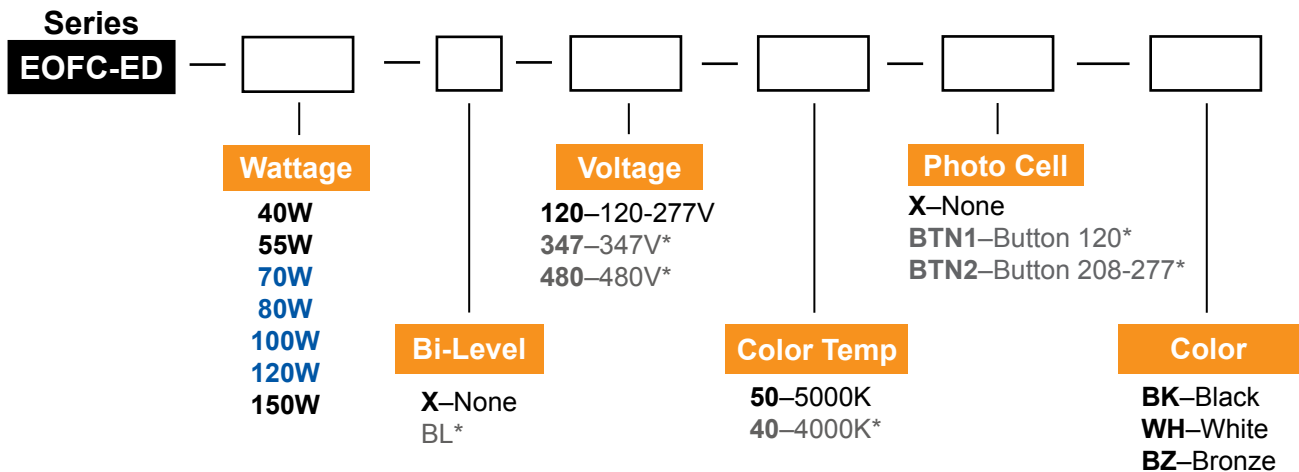

Bold = Standard

Grey * = Upgrade options available upon request

Blue = Bi-Level Wattage Options

Example: **EOFC-ED-70-BL-120-50-X-BK**

*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of pending patent applications in the US and PCT applications for International protection.

Call Toll Free: 888-383-7578



www.everlastlight.com

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203.
Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.



Dimensions

Photometric Data

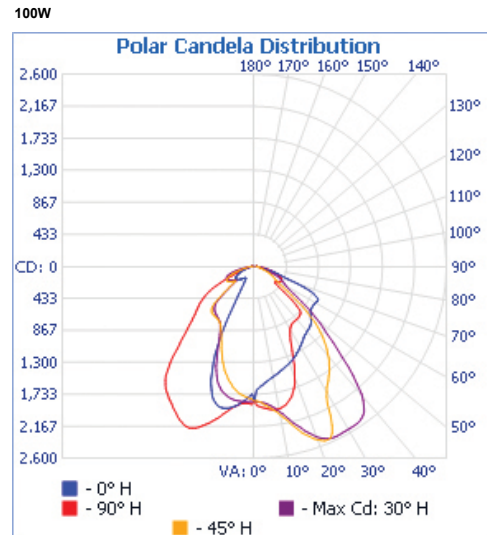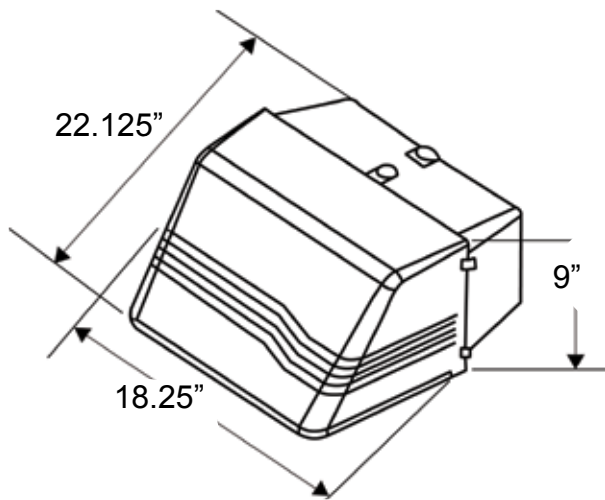

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
40W	3,350	84	82-85	5000	100,000 hours
55W	4,650	84	82-85	5000	100,000 hours
70W / 28W	5,900/2,400	84	82-85	5000	100,000 hours
80W / 32W	7,150/2,900	84	82-85	5000	100,000 hours
100W / 40W	8,400/3,400	84	82-85	5000	100,000 hours
120W / 48W	10,100/4,100	84	82-85	5000	100,000 hours
150W	12,600	84	82-85	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
44W	120-277V/480V*	0.38-0.17A / 0.10A	50/60Hz	>0.95	-30 to 130 F°	<10%
61W	120-277V/480V*	0.50-0.21A / 0.13A	50/60Hz	>0.95	-30 to 130 F°	<10%
78W / 82.6 / 36.9 dimmed	120-277V/480V*	0.63-0.29A / 0.16A	50/60Hz	>0.95	-40 to 130 F°	<10%
90W / 94.4 / 46.9 dimmed	120-277V/480V*	0.70-0.32A / 0.19A	50/60Hz	>0.95	-40 to 130 F°	<10%
111W / 118.0 / 58.5 dimmed	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-40 to 130 F°	<10%
134W / 141.6 / 70.1 dimmed	120-277V/480V*	1.05-0.46A / 0.28A	50/60Hz	>0.95	-40 to 130 F°	<10%
165W	120-277V/480V*	1.35-0.61A / 0.35A	50/60Hz	>0.95	-30 to 130 F°	<10%

Application Image



Office Building

Call Toll Free: 888-383-7578

www.everlastlight.com

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203.
Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.