



## Classic Shoe Box




### Description

- Series: ESB-ED
- Lamp Life Rating: 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP54
- Applications: Parking lots, billboards, athletic courts
- EPA: 1.4ft<sup>2</sup>
- Warranty: 10 Year Limited

### Specifications and Patent Pending Features

- Bi-Level Ballast option dims to 40% power for additional energy savings
- Die cast aluminum housing with bronze powder coat finish for corrosion-resistance
- Tempered glass lens for increased strength
- Anodized aluminum reflector designed to optimize light distribution
- Electronic ballast with high power factor
- Excellent vibration & shock resistance

## Ordering Information

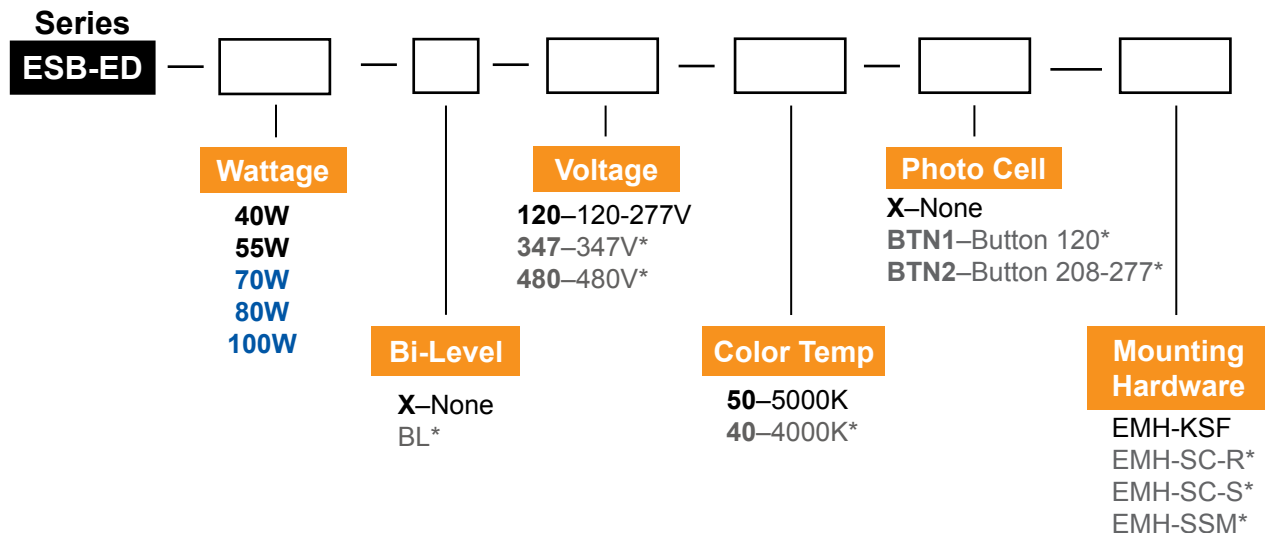

**Bold** = Standard

**Grey** \* = Upgrade options available upon request

**Blue** = Bi-Level Wattage Options

Example: **ESB-ED-70-BL-120-50-X-EMH-KSF**

\*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of pending patent applications in the US and PCT applications for International protection.


Call Toll Free: 888-383-7578

[www.everlastlight.com](http://www.everlastlight.com)


© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203.  
Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.



## Dimensions

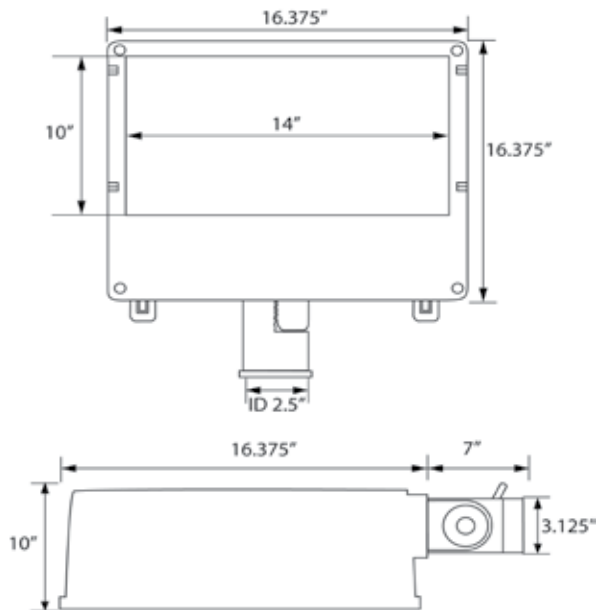

## Photometric Data

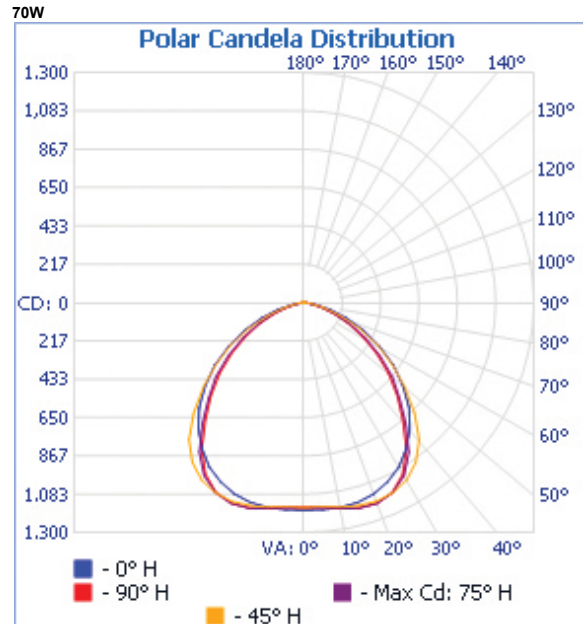

## Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
40W	3,350	84	82-85	5000	100,000 hours
55W	4,650	84	82-85	5000	100,000 hours
70W / 28W	5,900/2,400	84	82-85	5000	100,000 hours
80W / 32W	7,150/2,900	84	82-85	5000	100,000 hours
100W / 40W	8,400/3,400	84	82-85	5000	100,000 hours

## Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
44W	120-277V/480V*	0.37-0.16A / 0.10A	50/60Hz	>0.95	-40 to 130 F°	<10%
61W	120-277V/480V*	0.50-0.21A / 0.13A	50/60Hz	>0.95	-40 to 130 F°	<10%
78W / 82.6 / 36.9 dimmed	120-277V/480V*	0.63-0.29A / 0.16A	50/60Hz	>0.95	-40 to 130 F°	<10%
90W / 94.4 / 46.9 dimmed	120-277V/480V*	0.70-0.32A / 0.19A	50/60Hz	>0.95	-40 to 130 F°	<10%
111W / 118.0 / 58.5 dimmed	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-40 to 130 F°	<10%

## Application Image



Call Toll Free: 888-383-7578

[www.everlastlight.com](http://www.everlastlight.com)

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203. Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.