



Spot/Flood Light




Description

- Series: ESF-EC
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP65
- Applications: Billboards, buildings, parks, pools, parking lots, athletic courts, plazas
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Die cast aluminum housing with powder coated finish for corrosion-resistance
- Tempered glass lens and anodized aluminum reflector designed to optimize light distribution
- Gas-tight silicon rubber seal made for wet locations
- Electronic ballast with high power factor
- Excellent vibration & shock resistance

Ordering Information

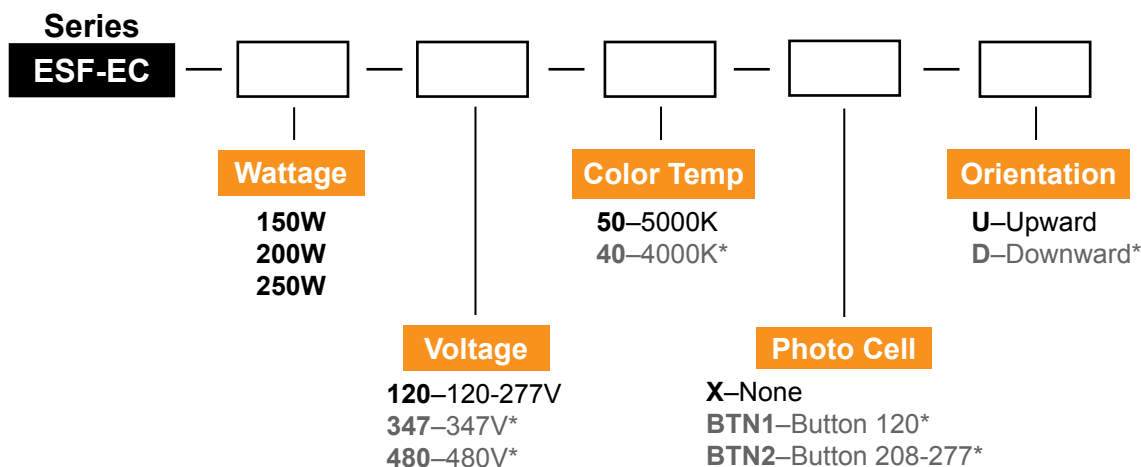

Bold = Standard

Grey * = Upgrade options available upon request


Example: **ESF-EC-200-120-50-X-U**

Call Toll Free: 888-383-7578


www.everlastlight.com



Dimensions

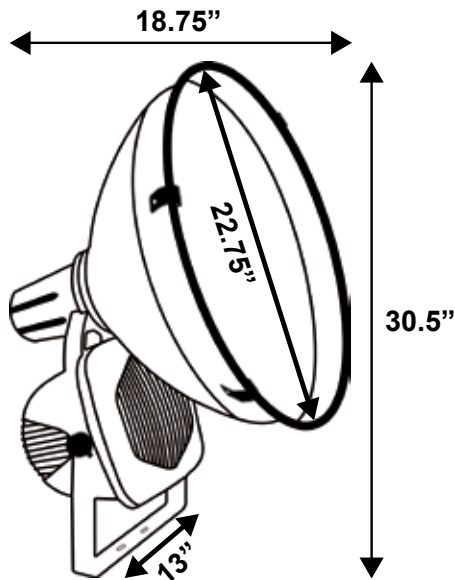

Photometric Data

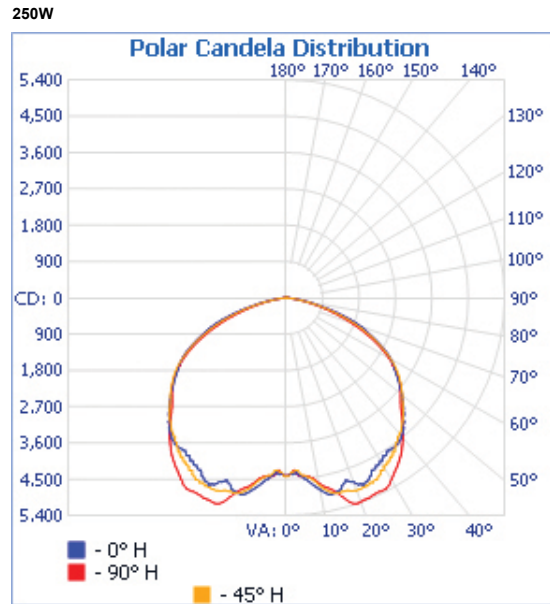

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
150W	12,600	84	82-85	5000	100,000 hours
100W	8,400	84	82-85	5000	100,000 hours
200W	16,800	84	82-85	5000	100,000 hours
250W	21,000	84	86-90	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
111W	120-277V/480V*	0.93-0.42A/ 0.22A	50/60Hz	>0.95	-40 to 130 F°	<10%
215W	120-277V/480V*	2.21-1.00A/ 0.56A	50/60Hz	>0.95	-40 to 130 F°	<10%
265W	120-277V/480V*	2.65-1.20A/ 0.62A	50/60Hz	>0.95	-40 to 130 F°	<10%
165W	120-277V/480V*	1.35-0.61A / 0.35A	50/60Hz	>0.95	-30 to 130 F°	<10%

Application Image



Apartment Complex

Call Toll Free: 888-383-7578

www.everlastlight.com

© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203.
Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.